



HM Hydrophones

The HM Series membrane hydrophones are designed for measuring pulsed ultrasound fields. Their extremely flat sensitivity results in the best reproduction of acoustic waveforms. Version A is the traditional hydrophone configuration, and a more rugged version B prevents membrane vibration during scanning motion. Version A is recommended for high power ultrasound work, where the absorption of energy by the backing could result in damage to the hydrophone. Both types are excellent choices as in-house primary or secondary standard, and for general purpose field mapping.

Features

- Rugged
- High Sensitivity
- Broadband
- Sealed design
- Integral preamplifier
- Choice of aperture sizes

Models

- HMA — free membrane
- HMB — backed membrane

Technical Specifications

	HMA-0200	HMA-0500	HMB-0200	HMB-0500
Frequency range ($\pm 3\text{dB}$)	0.5 to 45 MHz			
* Nominal Sensitivity [nV/Pa]	140	350	140	350
Output Impedance	50 Ω			
Max. Operating Temperature	40 °C			


* Provided with traceable calibration 1-20 MHz at 50 KHz intervals. For other calibrations available visit our web site.

Specifications are subject to change without notice.




HM Hydrophone


Typical Sensitivity Plot

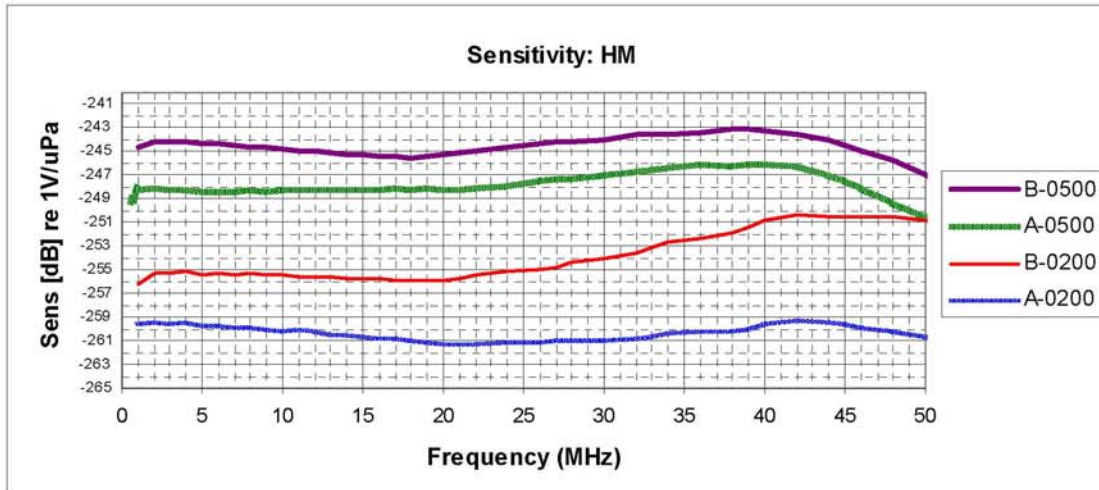

Typical Directivity Plot

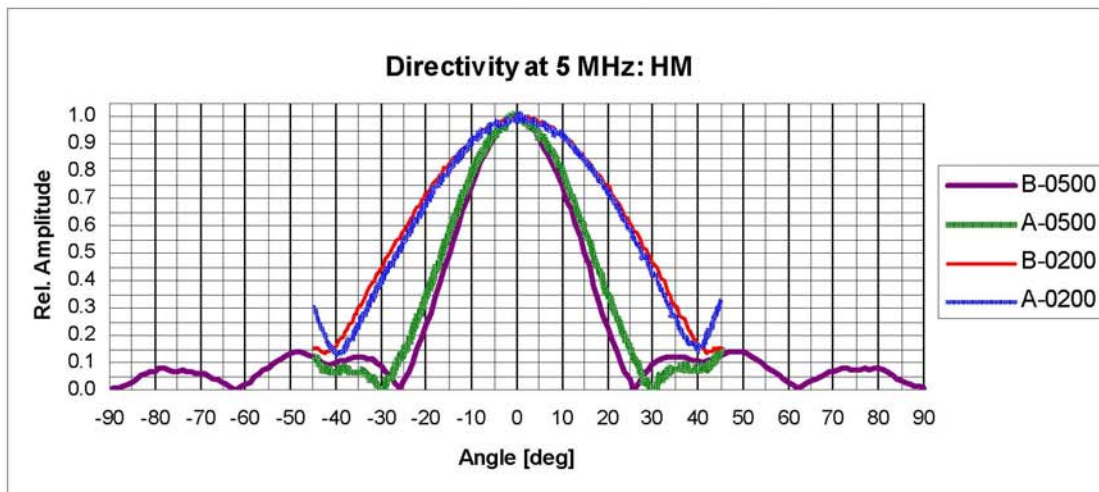

Mechanical Specifications

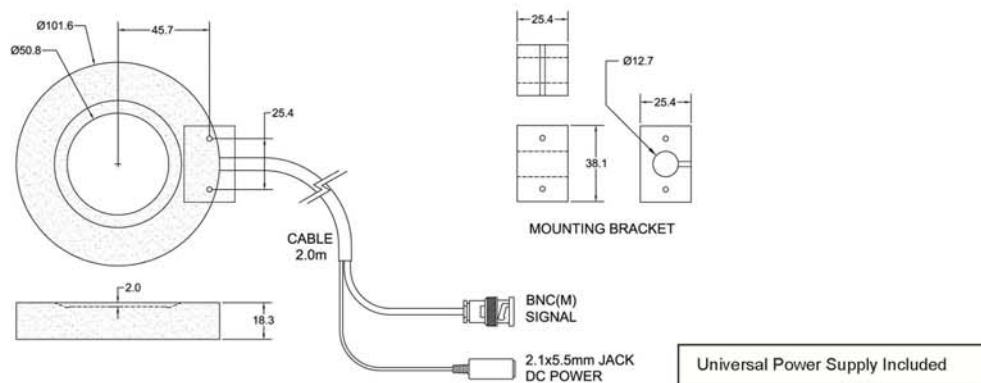

592 Weddell Drive, Suite 7, Sunnyvale, CA 94089, USA | Tel: 408.745.0383 | Fax: 408.745.0956 | www.ondacorp.com

取扱店:



ゼネレクス GENEREX
 有限会社 エヴィック産業
 211-0016 川崎市中原区市ノ坪 107
 Tel 044-712-6770 Fax 044-411-2855
 E-Mail: s-mikami@generex.co.jp
<http://www.generex.co.jp>